


# NEWMARKET PRE-CAST CONCRETE PRODUCTS

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

Model 2700 (600) Holding Tank – 1 Piece Unit  
Balancing Capacity ..... 2865 Litres (630 gal)

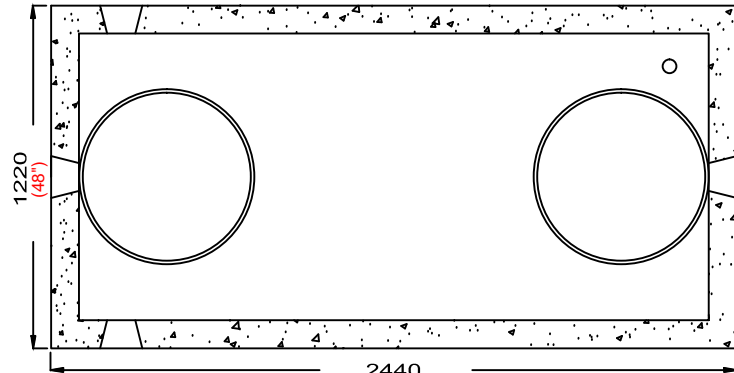


Top Section

- Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
- Single units are used as holding or balancing tanks.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 -7% air.
- 3.0 kg structural fiber added to concrete ASTM C 1116.
- Top 10m pre-manufactured welded wire.
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-10
- Non sulphate resistant concrete.
- Standard (3) 100mm inlet and (1) 100mm outlet.


Bare Weight ..... 2800 kg (6173 lb)  
Lid Weight ..... 710 kg (1565 lb)  
Total Weight ..... 3510 kg (7738 lb)

- Notes: 1: 75mm diameter PVC pipe cast in to facilitate pump installation or venting.  
2: Water storage capacity to under side of top..... 3,255 Ltr. (716gal)  
3: Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.

Designed for up to one metre burial over top of tank - vehicle traffic and up to two metre burial tanks are available upon request.  
Specialty conformation may be possible.

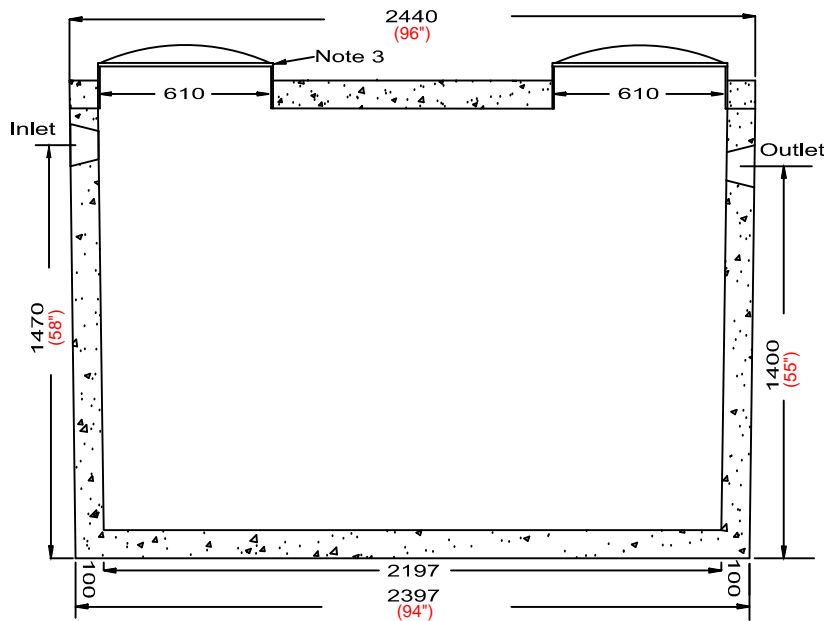

Side Elevation Section

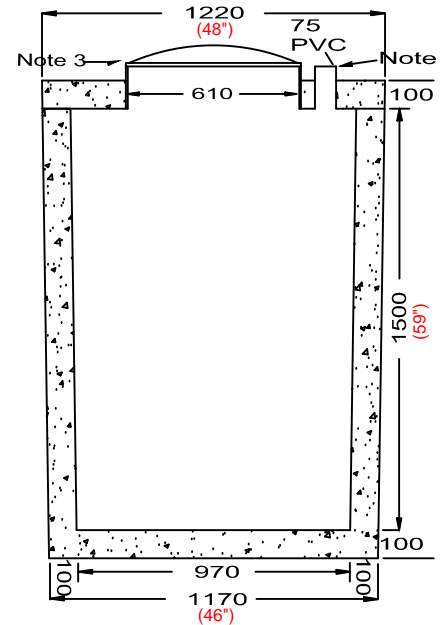

End Elevation Section

Tank markings observed:  
Inlet & outlet  
Marked on tank top - inlet end

NPCP 2015  
2700  
HOLDING  
BD 1M  
WC 2865  
NON-SUL  
AGINP