


NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

Model Low 11250 (2500 GAL) Holding Tank - 1 Piece Unit Working Capacity 11,106 Litres (2443 Gal)

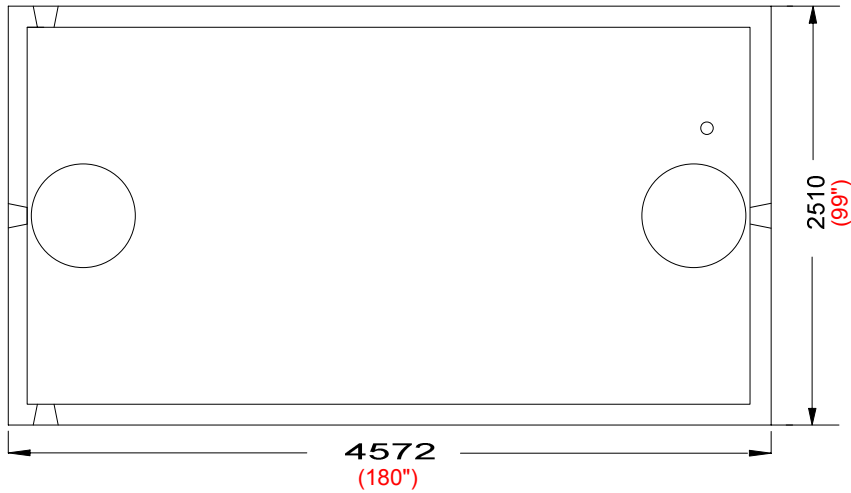


- This tank design is a one piece unit. Top is sealed with a fibrous mastic sealant
- tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air
- steel reinforced with 10m rebar, spaced at 400mm in each direction. CAN/CSA-G30.18.
- 1.5 Kg. structural fibre added to concrete. ASTM C 1116
- Lid has 10m Pre-manufactured welded wire.
- Rebar Cover 25mm
- Tanks conform to National Standards of Canada CAN/CSA B66-16
- Non-sulphate resistant concrete
- Standard (3) 100mm Inlets and 1 outlet fitted with flexible rubber connections

Bare Base Weight.....8,270 Kg (18,232 Lbs)
Lid Weight.....3,508 Kg (7734 Lbs)
Total Tank Weight.....11,778 Kg (25,966 Lbs)


Notes

1. 75mm dia. PVC pipe cast in to facilitate pump installation or venting
2. Water storage capacity to underside of lid..... 12,852 Litres (2827 Gal)
3. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top

Designed for up to one metre burial over top of tank - Deep burial and vehicle traffic tanks are available upon request. Speciality conformations may be possible

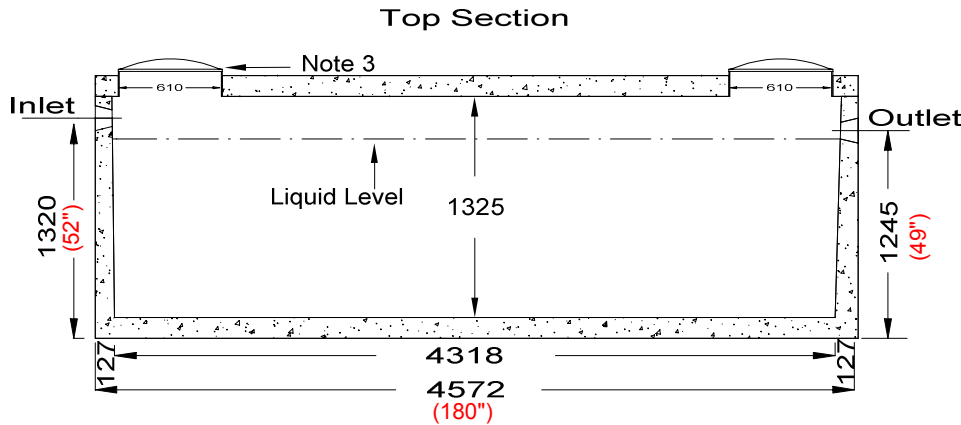

Side Elevation Section

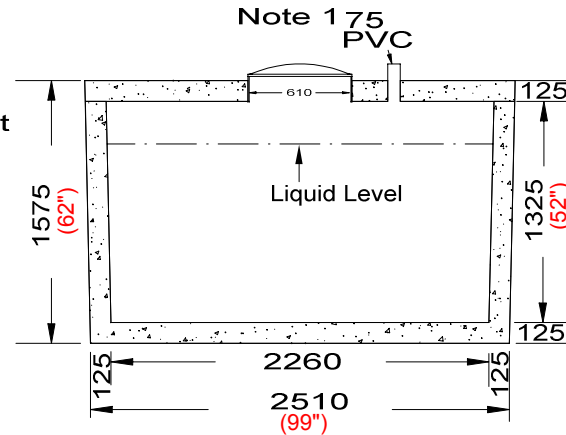

End Elevation Section

Tank Markings Observed:
Inlet & Outlet is Marked.
Tank is marked on tank lid - Inlet End

NPCP
2016 HOLDING 11250
B.D. 1 METRE
WC 11106
NON-SULPHATE
AGINP