


NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

Model 30,000 (6500 GAL) Septic Tank - 3 Piece Unit Working Capacity 31,300 Litres (6885 Gal)

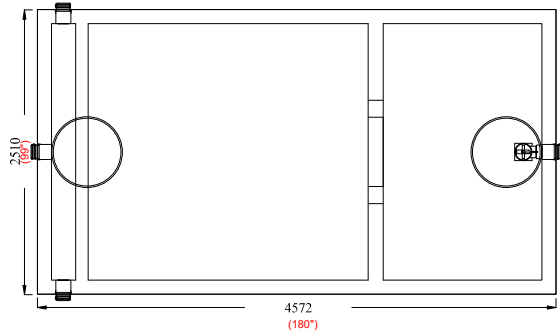

Top Section

- This tank design is installed in multiple units
- Each unit is tongue and groove design and is sealed with fibrous mastic sealant
- tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air
- Steel reinforced with 10m rebar, spaced at 400mm in each direction at 25mm cover. CAN/CSA-G30.18.
- Tanks conform to National Standards of Canada CAN/CSA B66-10
- Non-sulphate resistant concrete
- Standard (3) 100mm Inlets.
- Chamber divider monolithically cast with structure.


Top Third Weight..... 8420 Kg (18,562 Lbs)
 Middle Third Weight..... 3508 Kg (7734 Lbs)
 Bottom Third Weight..... 8270 Kg (18,232 Lbs)
 Total Tank Weight..... 21,206 Kg (44,529 Lbs)

Notes


1. Two 160mm Dia partition flow through holes
2. concrete inlet baffle is pre-fitted to accommodate three 100mm Flexible rubber connections
3. Outlet contains one 100mm flexible rubber connection fitted with 100mm filter that meets Ontario Building Code
4. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 50mm above top

Designed for up to one metre burial over top of tank - Deep burial and vehicle traffic tanks are available upon request. Speciality conformations may be possible

NOT TO BE USED IN A "MOUND" STYLE INSTALLATION

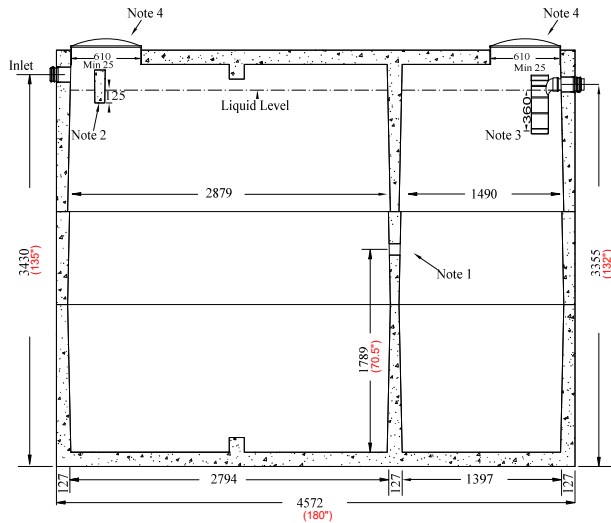


Side Elevation Section

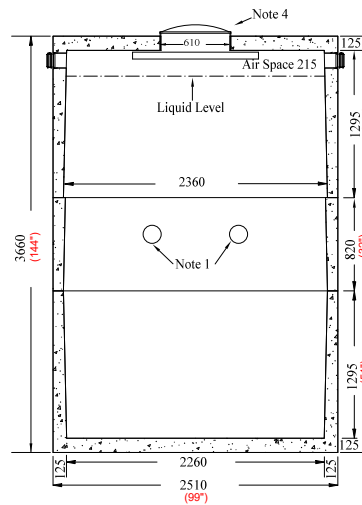


End Elevation Section

NPCP
 2017 SEPTIC 30000
 B.D. 1 METRE
 1200 LIQUID DEPTH
 WC 31300
 NON-SULPHATE
 AGINP
PML

Tank Markings Observed:
 Inlet & Outlet is Marked.
 Tank is marked on tank lid - Inlet End



Mastic Sealant



Mastic Sealant

Tongue and Groove Joint