


NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

Model 30,000 (6500 GAL) Holding Tank - 3 Piece Unit Working Capacity 31,818 Litres (6999 Gal)

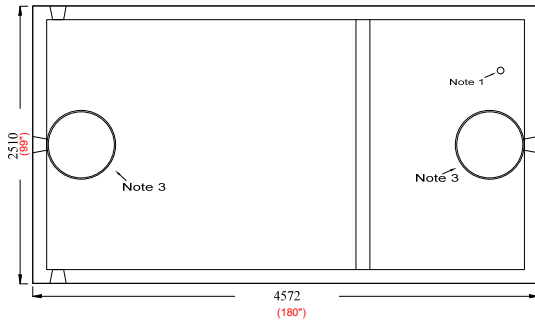

Top Section

- This tank design is installed in multiple units
- Each unit is tongue and groove design and is sealed with fibrous mastic sealant
- tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air
- Steel reinforced with 10m rebar, spaced at 400mm in each direction at 25mm cover. CAN/CSA-G30.18.
- Tanks conform to National Standards of Canada CAN/CSA B66-16
- Non-sulphate resistant concrete
- Standard Three 100mm Inlets and one 100mm outlet fitted with flexible rubber connections


Top Third Weight.....	8420 Kg (18,562 Lbs)
Middle Third Weight.....	3508 Kg (7734 Lbs)
Bottom Third Weight.....	8270 Kg (18,232 Lbs)
Total Tank Weight.....	20,198 Kg (44,528 Lbs)

Notes


1. 75mm dia. PVC pipe cast-in to facilitate pump installation or venting
2. Water Storage Capacity to underside of top.....**32,736 Litres (7201 Gal)**
3. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 50mm above concrete

Designed for up to one metre burial over top of tank - Deep burial and vehicle traffic tanks are available upon request. Specialty conformations may be possible

***Watertight seal cannot be guaranteed if Conseal Installation Guidelines are not followed. Please read and follow installation Guidelines from [Http://conseal.com/installation/ButylSealingTapes.pdf](http://conseal.com/installation/ButylSealingTapes.pdf)**

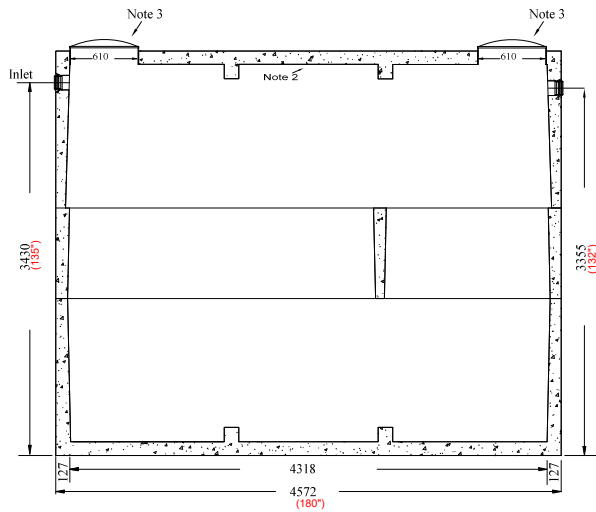


Side Elevation Section

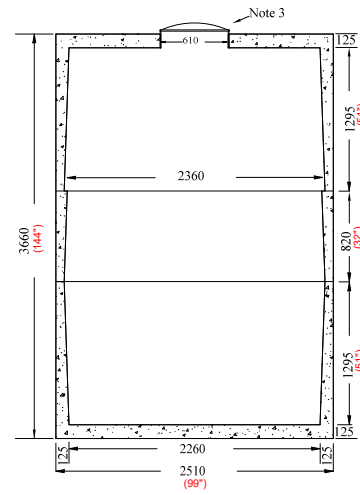

End Elevation Section

Tank Markings Observed:
Inlet & Outlet is Marked.
Tank is marked on tank lid - Inlet End

NPCP
2017 HOLDING 30000
B.D. 1 METRE
WC 31818
NON-SULPHATE
AGINP



Mastic Sealant

Tongue and Groove
Top Joint



Mastic Sealant

Tongue and Groove
Bottom Joint