



NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.
TELEPHONE: 905 852 6111 : TOLL FREE 1 800 263 1297

Model 22500 Holding Tank – 2 Piece Unit
 Balancing Capacity 23,331 Litres (5132 Gal)

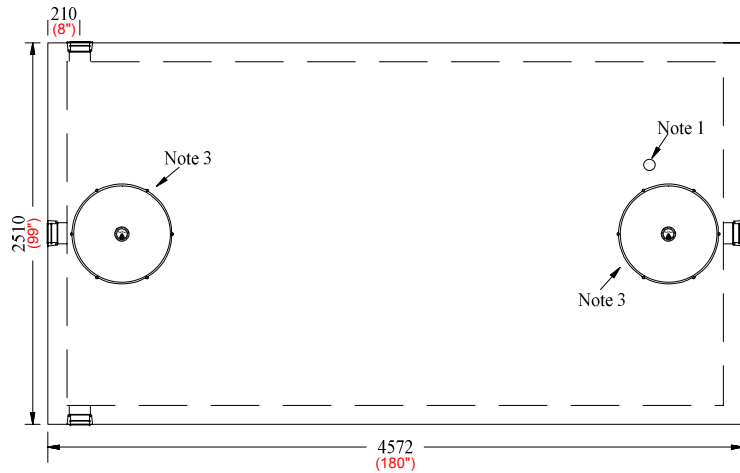

Top Section

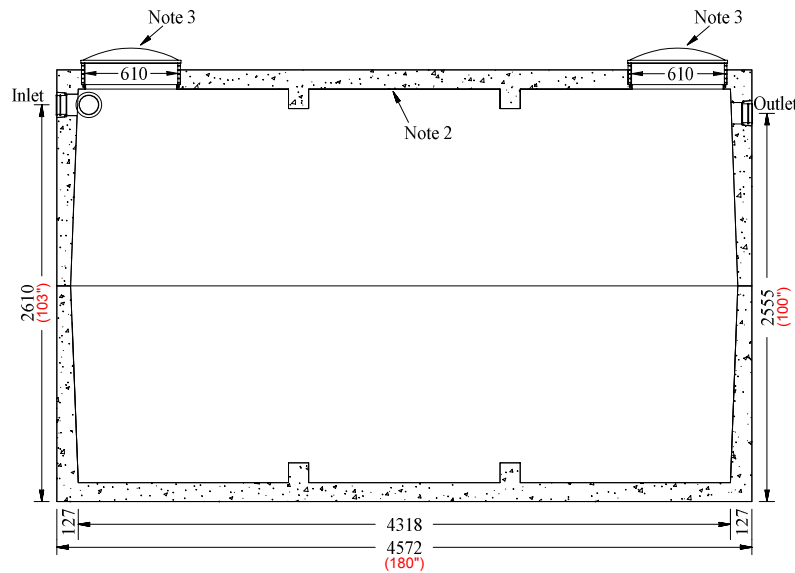


Side Elevation Section

- This tank design is installed in multiple units.
- Tongue and groove design is sealed with a fibrous mastic sealant.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 - 7% air.
- Steel reinforced with #3 Rebar, spaced at 400mm each direction.
- Non sulphate resistant concrete.
- Tanks conform to National Standards of Canada CAN/CSA B66-00.
- Rebar cover 25mm.
- Three 100mm inlets fitted with flexible rubber connections and a 100mm outlet fitted with flexible rubber connections

Top Half Weight 8420 kg (18563 lb)
 Bottom Half Weight ... 8270 kg (18232 lb)
 Total Tank Weight 16690 kg (36795 lb)

- Notes
- 1: 75mm PVC pipe cast in top of lid for access of any electrical cords
 - 2: Water Capacity to underside of top..... 20,050 Ltrs. (5730 Gal)
 - 3: Cast in Place 610mm ID plastic riser with plastic lid, secured with stainless steel, fasteners extending 100mm above top of tank

Recommended for ONE METRE burial over top of tank, away from any vehicular traffic. Two metre burial tanks and vehicle traffic are available upon request. Specialty conformations may be Possible To ensure water-tight seal, it is recommended that the joint be grouted both inside and out.

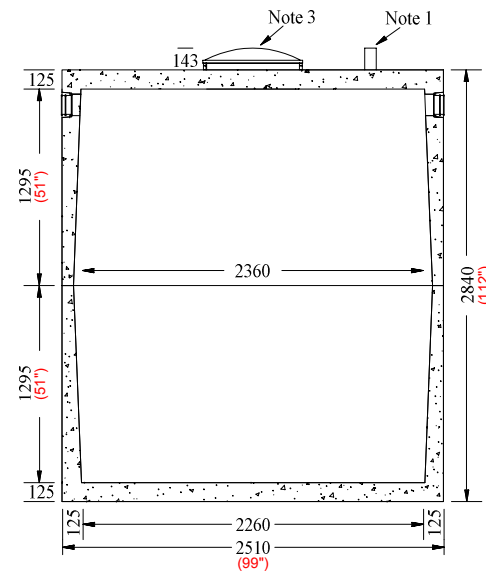

End Elevation Section

Tank markings observed:
 Inlet & outlet are marked.
 Tank is marked on tank lid - Inlet End

NPCP 2015
 22500
 HOLDING
 BD 1M
 WC 23331
 NON-SUL
 AGINP
 PML



Mastic Sealant

Tongue and Groove Joint