


NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.


Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

Model 6800 (1500 GAL) Holding Tank - 1 Piece Unit

Working Capacity 7125 Litres (1567 Gal)

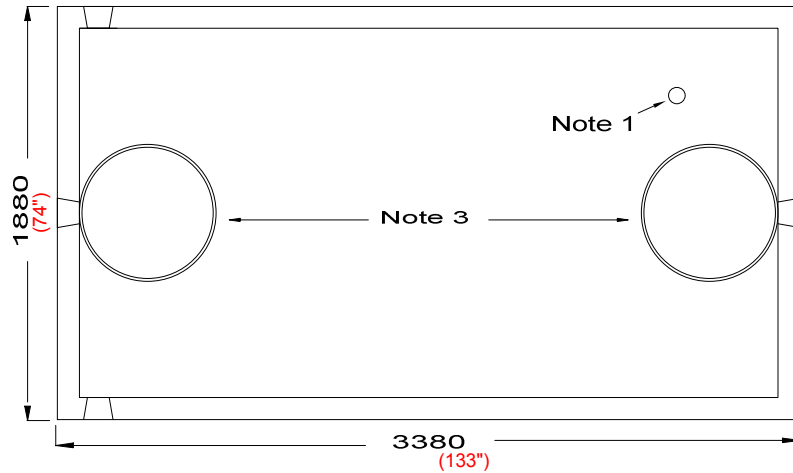

Top Section

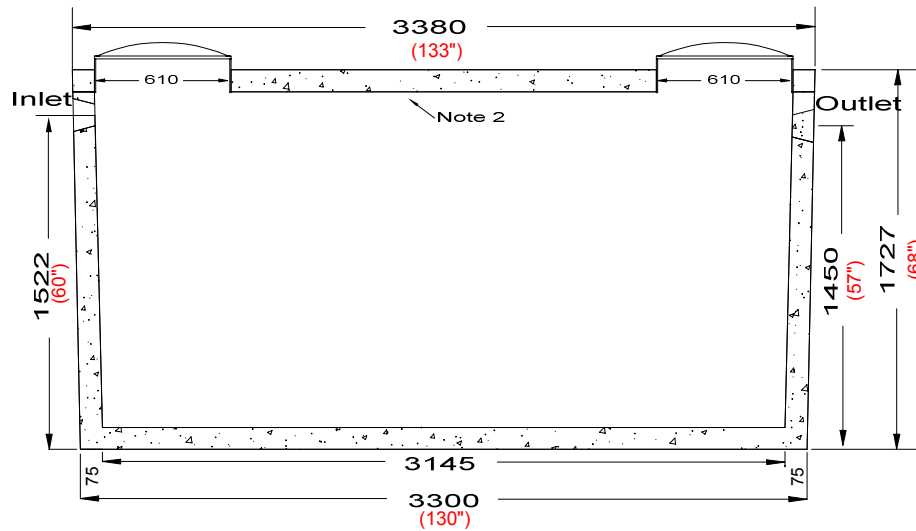

Side Elevation Section


- This tank design is a one piece unit. Top is sealed with a fibrous mastic sealant
- tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air
- Steel reinforced with 4-10M in the long direction, 7-10M in the short direction in the base and in the walls 4-10M horizontal with verticals matching the base
- 3.0 Kg. structural fibre added to concrete. ASTM C 1116
- Lid has 10m Pre-manufactured welded wire
- Rebar Cover 25mm
- Tanks conform to National Standards of Canada CAN/CSA B66-16
- Non-sulphate resistant concrete
- Standard (3) 100mm Inlets and 1 outlet fitted with flexible rubber connections

Bare Base Weight.....4550 Kg (10,031 Lbs)
Lid Weight.....1550 Kg (3417 Lbs)
Total Tank Weight.....6100 Kg (13,448 Lbs)

Notes

1. 75mm dia. PVC pipe cast-in to facilitate pump installation or venting
2. Water Storage Capacity to underside of top..... 7,940 Ltrs. (1746 gal.)
3. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 50mm above concrete

Designed for up to one metre burial over top of tank - Deep burial and vehicle traffic tanks are available upon request. Specialty conformations may be possible

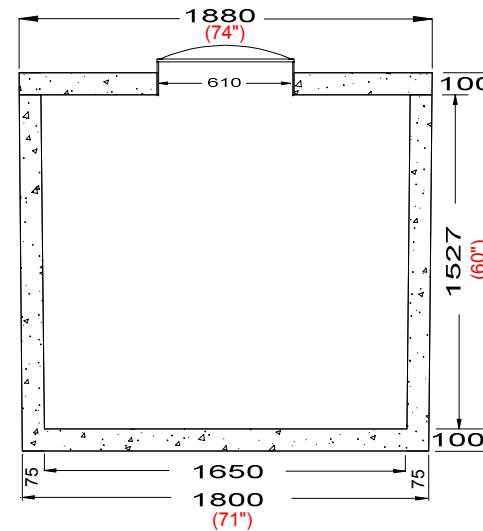

End Elevation Section

Tank Markings Observed:
Inlet & Outlet is Marked.
Tank is marked on tank lid - Inlet End

NPCP
2017 HOLDING 6800
B.D. 1 METRE
WC 7125
NON-SULPHATE
AGINP