



NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

Model 9000 Low (2000 GAL) Holding Tank - 2 Piece Unit Working Capacity 9190 Litres (2021 Gal)

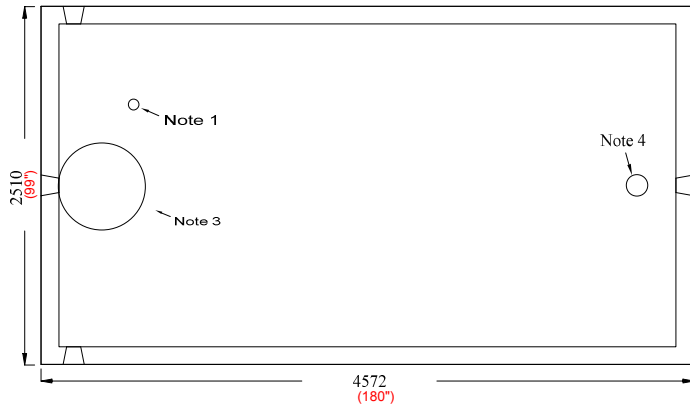

Top Section

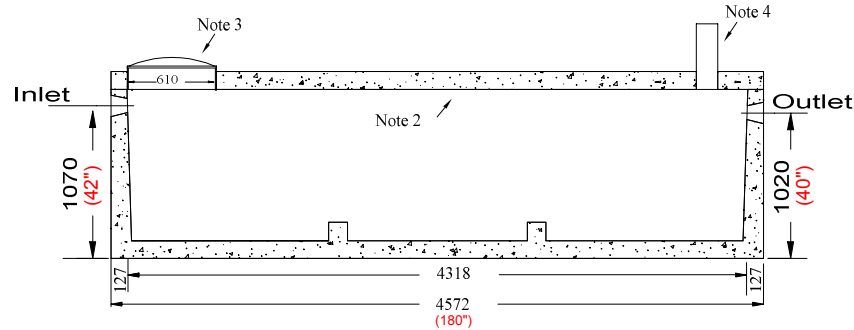

Side Elevation Section


- This tank design is installed in multiple units
- Each unit is tongue and groove design and is sealed with fibrous mastic sealant
- tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air
- Steel reinforced with 10m rebar, spaced at 400mm in each direction at 25mm cover. CAN/CSA-G30.18.
- Tanks conform to National Standards of Canada CAN/CSA B66-16
- Non-sulphate resistant concrete
- Standard (3) 100mm Inlets and 1 outlet fitted with flexible rubber connections

Bare Tank Weight..... 7470 Kg (16,468 Lbs)
Lid Weight..... 3510 Kg (7738 Lbs)
Total Tank Weight..... 15,175 Kg (33,455 Lbs)

Notes

1. 75mm dia. PVC pipe cast-in to facilitate pump installation or venting
2. Water Storage Capacity to underside of top..... **10,410 Ltrs. (2289 gal.)**
3. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 25mm above concrete
4. 150mm x 460mm PVC pipe as pump out extension, riser and lid also available

Designed for up to one metre burial over top of tank - Deep burial and vehicle traffic tanks are available upon request. Specialty conformations may be possible

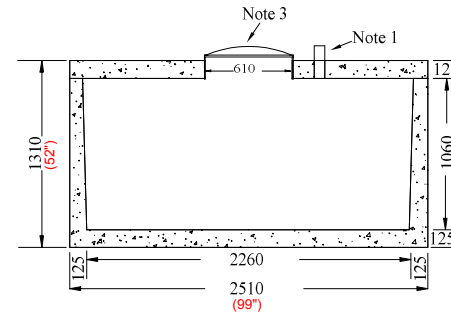

End Elevation Section

Tank Markings Observed:
Inlet & Outlet is Marked.
Tank is marked on tank lid - Inlet End

NPCP
2017 HOLDING 9000 LO
B.D. 1 METRE
WC 9190
NON-SULPHATE
AGINP