

# NEWMARKET PRE-CAST CONCRETE PRODUCTS

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

## Model 6800 (1500) Holding Tank – 1 Piece Unit Balancing Capacity ..... 7125 Litres (1567 gal)




- Design shown is a one piece unit. The top is sealed with a fibrous mastic sealant.
- Single units are used as holding or balancing tanks.
- Tanks are cast with 35 MPA strength concrete at 7 days with 5 -7% air.
- 3.0 kg. structural fiber added to contract. ASTM C 1116.
- Top 10m pre-manufactured welded steel..
- Rebar cover 25mm.
- Tanks conform to National Standards of Canada CAN/CSA B66-10.
- Non sulphate resistant concrete.
- Standard (3) 100mm inlets and a 100mm outlet.

Bare Weight ..... 4550 kg (10031 lb)  
Lid Weight ..... 1550 kg (3417 lb)  
Total Tank Weight 6100 kg (13448 lb)

**Note**

- 1: 75mm diameter PVC pipe cast in to facilitate pump installation or venting.
2. Water storage capacity to under side of top ..... **7,940 Ltr. (1746gal)**
- 3: Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 100mm above top of tank.

Designed for up to one metre burial over top of tank - vehicle traffic and up to two metre burial tanks are available upon request. Specialty conformation may be possible.

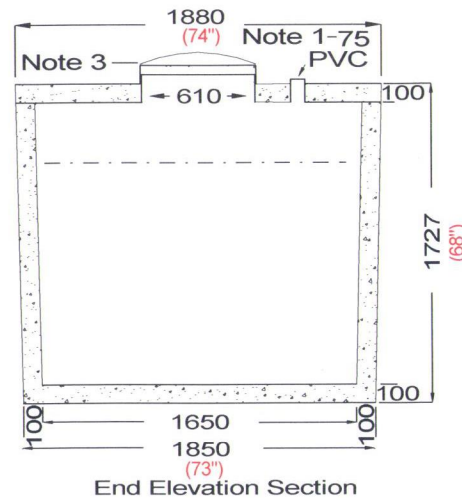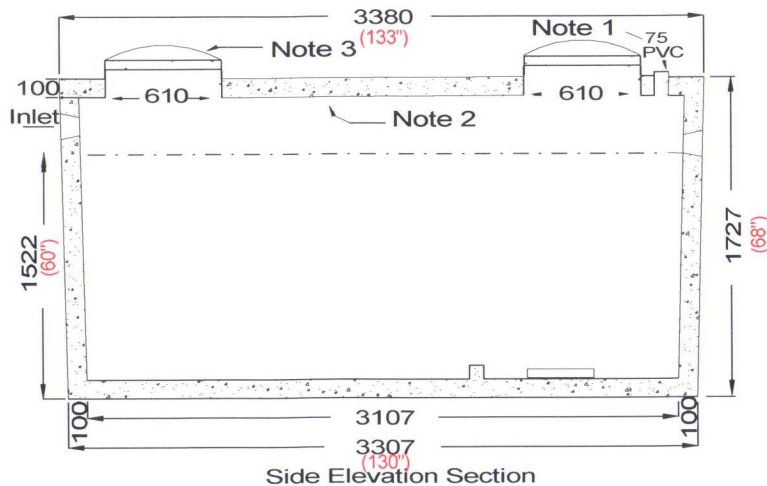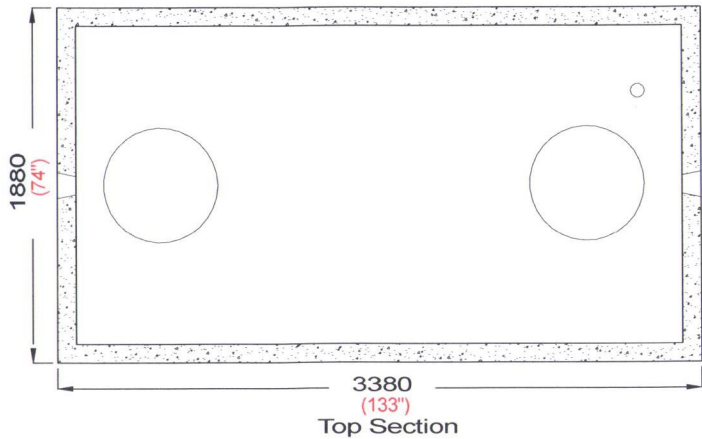

Tank markings observed;  
Inlet & outlet.  
Marked on tank top - inlet end

NPCP 2014  
6800  
HOLDING  
BD 1M  
WC 7125  
NON-SUL  
AGINP