


# NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

## Model Low 3600 (800 GAL) Holding Tank - 1 Piece Unit

### Working Capacity 3468 Litres (762 Gal)

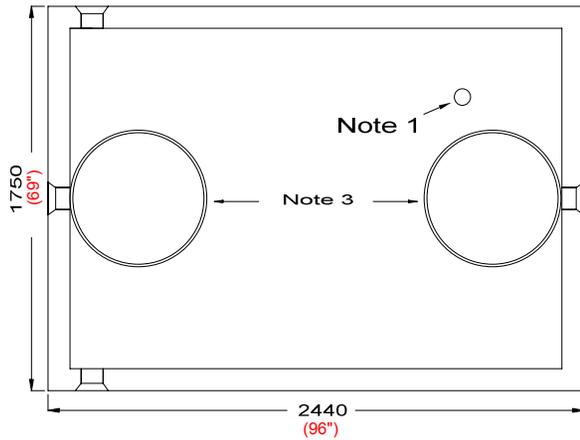

Top Section


- This tank design is a one piece unit. Top is sealed with a fibrous mastic sealant
- tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air
- 3.0 Kg. structural fibre added to concrete. ASTM C 1116
- Lid has 10m Pre-manufactured welded wire
- Rebar Cover 25mm
- Tanks conform to National Standards of Canada CAN/CSA B66-10
- Non-sulphate resistant concrete
- Standard (3) 100mm Inlets and 1 outlet fitted with flexible rubber connections

Bare Base Weight.....3260 Kg (7187 Lbs)  
 Lid Weight.....1040 Kg (2293 Lbs)  
 Total Tank Weight.....4300 Kg (9480 Lbs)


Notes

1. 75mm dia. PVC pipe cast-in to facilitate pump installation or venting
2. Water Storage Capacity to underside of top..... **3,960 Ltrs. (871 gal.)**
3. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 50mm above concrete

Designed for up to one metre burial over top of tank - Deep burial vehicle traffic tanks are available upon request. Specialty conformations may be possible

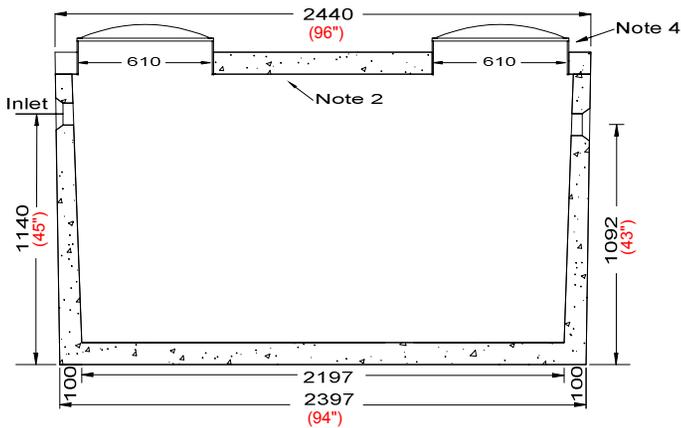

Side Elevation Section

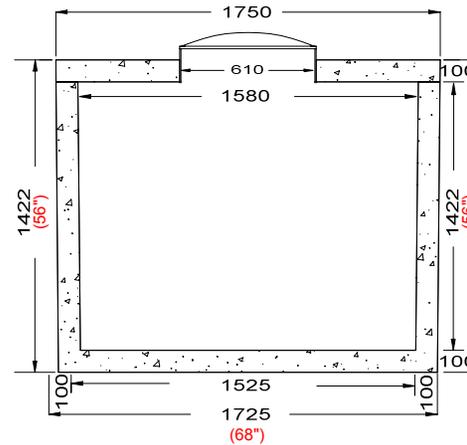

End Elevation Section

Tank Markings Observed:  
 Inlet & Outlet is Marked.  
 Tank is marked on tank lid - Inlet End

NPCP  
 2017 HOLDING LO 3600  
 B.D. 1 METRE  
 WC 3468  
 NON-SULPHATE  
 AGINP