


NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

Model 9000 (2000 GAL) Holding Tank - 1 Piece Unit Working Capacity 9627 Litres (2118 Gal)

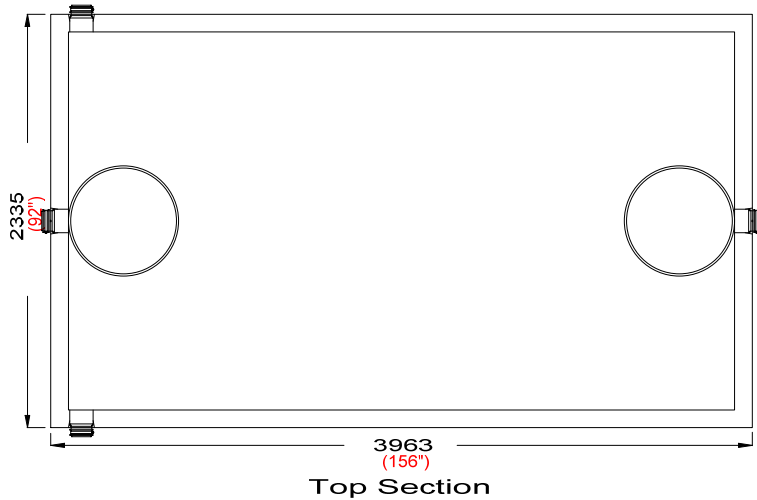

- This tank design is a one piece unit. Top is sealed with a fibrous mastic sealant
- tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air
- Steel reinforced with 4-10M in the long direction, 5-10M in the short direction in the base and in the walls 4-10M horizontal with verticals matching the base
- 1.5 Kg. structural fibre added to concrete. ASTM C 1116
- Lid has 10m Pre-manufactured welded wire.
- Rebar Cover 25mm
- Tanks conform to National Standards of Canada CAN/CSA B66-16
- Non-sulphate resistant concrete
- Standard (3) 100mm Inlets and 1 outlet fitted with flexible rubber connections

Bare Base Weight.....6005 Kg (13,239 Lbs)



Lid Weight.....2295 Kg (5059 Lbs)

Total Tank Weight.....8300 Kg (18,298 Lbs)

Notes

1. 75mm dia. PVC pipe cast-in to facilitate pump installation or venting
2. Water Storage Capacity to underside of top..... **10,878 Ltr. (2393gal)**
3. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 75mm above concrete

Designed for up to one metre burial over top of tank - Deep burial and vehicle traffic tanks are available upon request. Specialty conformations may be possible

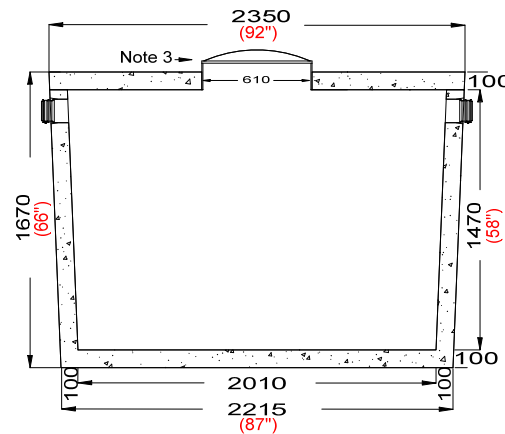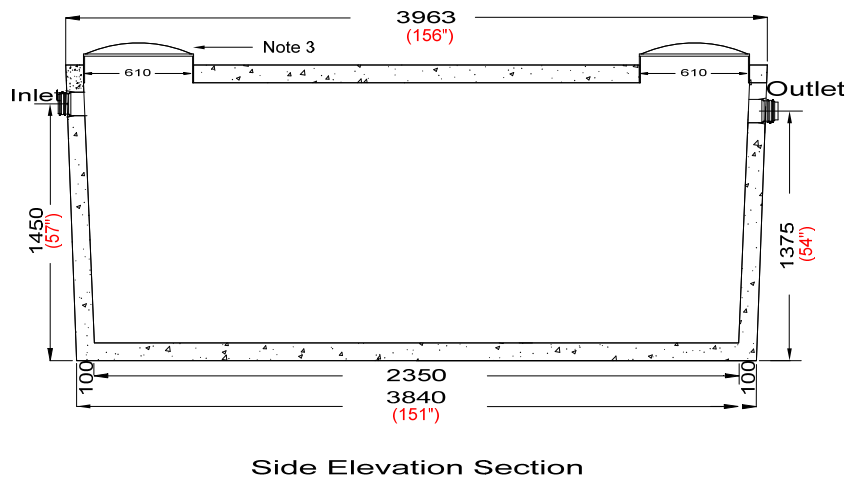

Tank Markings Observed:
Inlet & Outlet is Marked.
Tank is marked on tank lid - Inlet End

NPCP
2017 HOLDING 9000
B.D. 1 METRE
WC 9627
NON-SULPHATE
AGINP