


# NEWMARKET PRE-CAST CONCRETE PRODUCTS LTD.

Telephone: 905-852-6111 ; Toll Free 1-800-263-1297

## Model 9000 (2000 GAL) Holding Tank - 1 Piece Unit Working Capacity 9627 Litres (2118 Gal)

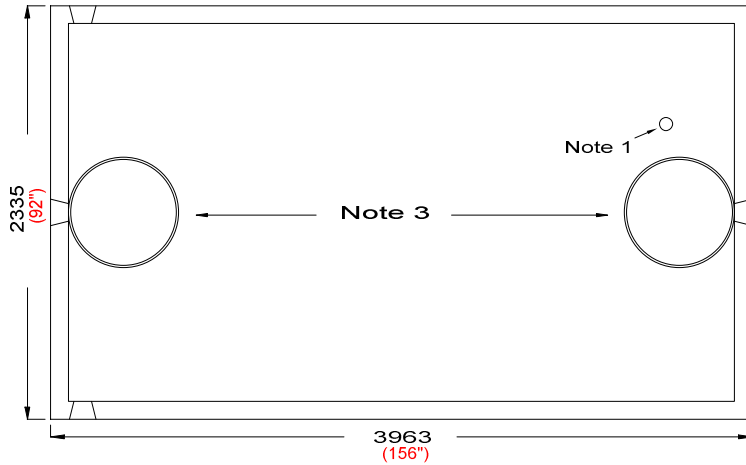

Top Section


- This tank design is a one piece unit. Top is sealed with a fibrous mastic sealant
- tanks are cast with 35 MPA strength concrete at 7 days with 5-7% air
- Steel reinforced with 4-10M in the long direction, 5-10M in the short direction in the base and in the walls 4-10M horizontal with verticals matching the base
- 1.5 Kg. structural fibre added to concrete. ASTM C 1116
- Lid has 10m Pre-manufactured welded wire.
- Rebar Cover 25mm
- Tanks conform to National Standards of Canada CAN/CSA B66-16
- Non-sulphate resistant concrete
- Standard (3) 100mm Inlets and 1 outlet fitted with flexible rubber connections

Bare Base Weight.....6005 Kg (13,239 Lbs)  
Lid Weight.....2295 Kg (5059 Lbs)  
Total Tank Weight.....8300 Kg (18,298 Lbs)


Notes

1. 75mm dia. PVC pipe cast-in to facilitate pump installation or venting
2. Water Storage Capacity to underside of top..... 10,878 Ltr. (2393gal)
3. Cast in place 610mm ID plastic riser with plastic lid secured with stainless steel fasteners extending 50mm above concrete

Designed for up to one metre burial over top of tank - Deep burial and vehicle traffic tanks are available upon request. Specialty conformations may be possible

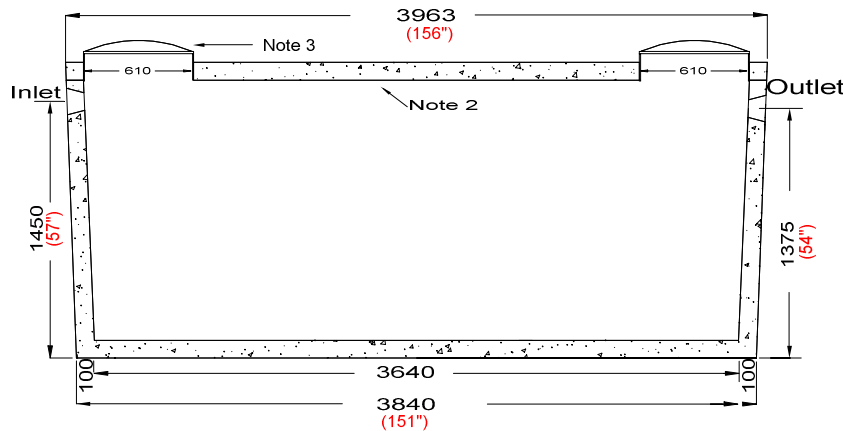

Side Elevation Section

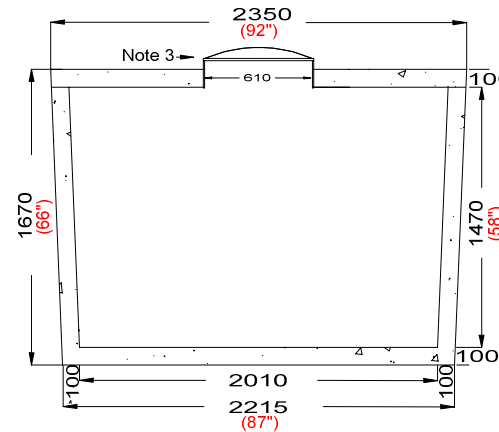

End Elevation Section

Tank Markings Observed:  
Inlet & Outlet is Marked.  
Tank is marked on tank lid - Inlet End

**NPCP**  
2017 HOLDING 9000  
B.D. 1 METRE  
WC 9627  
NON-SULPHATE  
AGINP